

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS IIN-D119-646 REV. C
AND INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D119-646 REV. 2
REF FAA STC: SR02024SE
REF EASA STC: 10040294

1.0 PURPOSE:


The purpose of this Dart Service Instructions is to add D119-646-313/-314 Skidtube Protector Kit to make the D119-646-011/-012/-111/-112/-211/-212 Skidtube Kits compatible with the 109-0812-68-105 Hoist Structural Provision Kit and the 109-0816-18-301 Rappelling Kit. The D119-646-313 Skidtube Protector, LH replaces the 109-B710-05-201 kit and the D119-646-314 Skidtube Protector, RH replaces the 109-B710-05-202 kit.

2.0 D119-646-313/-314 INSTALLATION:

These instructions are for modifying the D119-646-011/-012/-111/-112 Skidtube Installations.

- 2.1 Remove D3492-045 Plug Assemblies from two locations on each side of the skidtube as shown in Figure 3.
- 2.2 Position D5376-1 drilling jig tool with the arrow pointing fwd as shown in Figure 3. Use 2x AN3-45A bolts to hold the jig in place. Transfer drill 4x $\varnothing 0.129$ " (#30 drill) holes from D5376-1 drilling jig to skidtube ridge as shown in Figure 3. **Caution:** Drill perpendicular to the skidtube ridge.
- 2.3 Remove drilling jig. Using a 5/16" drill, open up the pilot holes and drill through the skidtube ridge and center web inside of the skidtube. **Caution:** Drill perpendicular to the skidtube ridge.
- 2.4 Countersunk 4x 5/16" holes to $\varnothing 0.348$ " (8.84mm) x 100° as shown in Figure 3 and deburr.
- 2.5 Repeat steps 2.2 to 2.4 for the opposite side of the skidtube.
- 2.6 Vacuum the debris from inside of the skidtube. Touch up affected area using (Alodine 1200 or 1201) per MIL-DTL-5541.
- 2.7 Install 8x D5374-3 Bushings in the new holes. Seal bushings with Sikaflex-241/-291 or Proseal 890 or MIL-S-8802 Class 'B2' sealant as shown in Section C-C.
- 2.8 Remove all D3492-045 Plug Assemblies from skidtube fwd of the ground handling wheel lugs.
- 2.9 If the D119-646-314 Skidtube Protector Kit is required for hoisting operations on the RH side of the aircraft install D5372-1 Plug using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 4 Detail E. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.10 If the D119-646-313 Skidtube Protector Kit is required for hoisting operations on the LH side of the aircraft install D5372-1 Plug using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 4 Detail E. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.11 If the D119-646-314 Skidtube Protector Kit is required for rappelling operations on the RH side of the aircraft install D5371-2 Hook using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 5 Detail F. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.12 If the D119-646-313 Skidtube Protector Kit is required for rappelling operations on the LH side of the aircraft install D5371-1 Hook using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 5 Detail F. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.13 Install D5369-2 Cable Guard on the RH side of the aircraft using 6x AN3-47A bolts, 6x D5374-1 Bushings, 6x D4506-3 Washers, 12x NAS11490D332J washers, 6x MS21042L3 nuts as shown in Figure 1 Section A-A. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.14 Install D5369-1 Cable Guard on the LH side of the aircraft using 6x AN3-47A bolts, 6x D5374-1 Bushings, 6x D4506-3 Washers, 12x NAS11490D332J washers, 6x MS21042L3 nuts as shown in Figure 1 Section A-A. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 2.15 Update aircraft log book to indicate installation of the D119-646-313/-314 kit and adjust weight and balance record for the aircraft with weight and balance data provided in Section 5.0 of this document.

NOTE: Additional NAS1149D0332J washers may be installed under the nuts to ensure 1.5-4 threads in safety on the bolts. Although not generally necessary, it is also acceptable to replace the AN3 bolts provided with longer or shorter AN3 bolts, if required.


A	NEW ISSUE		RF	15.12.10
REV.	DESCRIPTION		BY	DATE
DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR		
DRAWN	RF			
CHECKED	HS	DRAWING NO.	REV. A	
MFG. APPR.	N/A	DSI 9734	SHEET 1 OF 8	
APPROVED	HS	TITLE	SCALE	
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS	
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.		

3.0 D119-646-313/-314 INSTALLATION:

These instructions are for modifying the D119-646-211/-212 Skidtube Installations.

- 3.1 Temporarily remove D3849-043 Training Wearplate from aft end of the skidtube per ICA-D119-646 Section 32.
- 3.2 Position D5376-1 drilling jig tool with the arrow pointing fwd as shown in Figure 3. Use 2x AN3-45A bolts to hold the jig in place. Transfer drill 4x $\varnothing 0.129$ " (#30 drill) holes from D5376-1 drilling jig to skidtube ridge as shown in Figure 3. **Caution:** Drill perpendicular to the skidtube ridge.
- 3.3 Remove drilling jig. Using a 5/16" drill, open up the pilot holes and drill through the skidtube ridge and center web inside of the skidtube. **Caution:** Drill perpendicular to the skidtube ridge.
- 3.4 Countersunk 4x 5/16" holes to $\varnothing 0.348$ " (8.84mm) x 100° as shown in Figure 3 and deburr.
- 3.5 Repeat steps 3.2 to 3.4 for the opposite side of the skidtube.
- 3.6 Vacuum the debris from inside of the skidtube. Touch up affected area using (Alodine 1200 or 1201) per MIL-DTL-5541.
- 3.7 Install 8x D5374-3 Bushings in the new holes. Seal bushings with Sikaflex-241/-291 or Proseal 890 or MIL-S-8802 Class 'B2' sealant as shown in Section C-C.
- 3.8 Remove and discard all hardware attaching the training wearplates in front of the skidtube ground handling lugs.
- 3.9 If the D119-646-314 Skidtube Protector Kit is required for hoisting operations on the RH side of the aircraft install D5372-1 Plug using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 4 Detail E. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.10 If the D119-646-313 Skidtube Protector Kit is required for hoisting operations on the LH side of the aircraft install D5372-1 Plug using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 4 Detail E. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.11 If the D119-646-314 Skidtube Protector Kit is required for rappelling operations on the RH side of the aircraft install D5371-2 Hook using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 5 Detail F. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.12 If the D119-646-313 Skidtube Protector Kit is required for rappelling operation on the LH side of the aircraft install D5371-1 Hook using 4x AN3-45A bolts, 8x NAS11490D332J washer and 4x MS21042L3 nuts as shown in Section C-C and Figure 5 Detail F. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.13 Reinstall the D3849-043 Training Wearplate on the aft end of the skidtube per ICA-D119-646 Section 32, except for hardware under D5369-1/-2 Cable Guard.
- 3.14 Install D5369-2 Cable Guard on the RH side of the aircraft using 6x AN3-50A bolts, 6x D5374-1 Bushings, 6x D3904-1 Washers, 6x MS21042L3 nuts as shown in Figure 2 Section B-B. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.15 Install D5369-1 Cable Guard on the LH side of the aircraft using 6x AN3-50A bolts, 6x D5374-1 Bushings, 6x D3904-1 Washers, 6x MS21042L3 nuts as shown in Figure 2 Section B-B. Torque bolts to 15-25 in-lbs (1.7-2.8 N-m).
- 3.16 Update aircraft log book to indicate installation of the D119-646-313/-314 kit and adjust weight and balance record for the aircraft with weight and balance data provided in Section 5.0 of this document.

NOTE: Additional NAS1149D0332J washers may be installed under the nuts to ensure 1.5-4 threads in safety on the bolts. Although not generally necessary, it is also acceptable to replace the AN3 bolts provided with longer or shorter AN3 bolts, if required.

DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9734	SHEET 2 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	


4.0 PARTS LIST:

Qty. -313	Qty. -314	PART NUMBER	DESCRIPTION
X		D119-646-313	SKIDTUBE PROTECTOR, LH
	X	D119-646-314	SKIDTUBE PROTECTOR, RH
6	6	D3904-1	WASHER
6	6	D4506-3	WASHER
1		D5369-1	CABLE GUARD, LH
	1	D5369-2	CABLE GUARD, RH
1		D5371-1	HOOK, LH
	1	D5371-2	HOOK, RH
1	1	D5372-1	PLUG
6	6	D5374-1	BUSHING
8	8	D5374-3	BUSHING
1	1	D5376-1	DRILLING JIG
4	4	AN3-45A	BOLT
6	6	AN3-47A	BOLT
6	6	AN3-50A	BOLT
14	14	NAS1149D0332J	WASHER
10	10	MS21042L3	NUT

5.0 WEIGHT AND BALANCE

The following weight and balance changes are applicable:

Installation	Weight	LONGITUDINAL		LATERAL	
		Arm	Moment	Arm	Moment
D119-646-313 SKIDTUBE PROTECTOR, LH	4.3 lb 1.95 kg	108.1 in 4.3 m	465 in-lb 8.4 kg-m	-43.4 in 1.7 m	-187 in-lb -3.3 kg-m
D119-646-314 SKIDTUBE PROTECTOR, RH	4.3 lb 1.95 kg	108.1 in 4.30 m	465 in-lb 8.4 kg-m	43.4 in 1.7 m	187 in-lb 3.3 kg-m

DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9734	SHEET 3 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

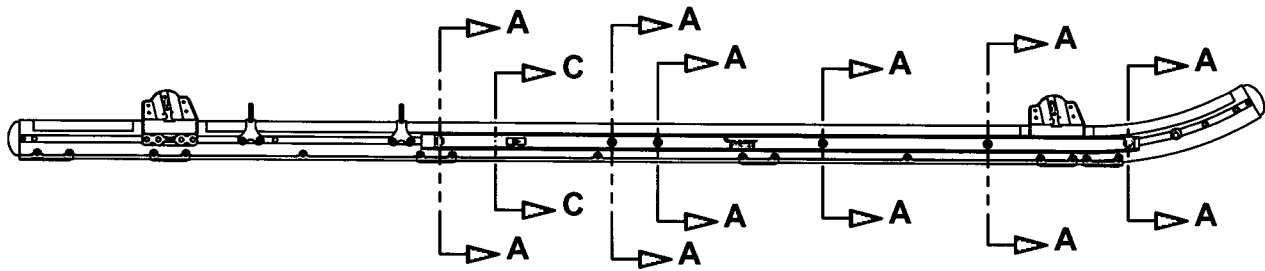


FIGURE 1: D119-646-314 SKIDTUBE PROTECTOR KIT, RH (SHOWN)
 (D119-646-313 SKIDTUBE PROTECTOR, LH (OPPOSITE))
 (SHOWN INSTALLED ON D119-646-011/-012/-111/-112 SKIDTUBES)



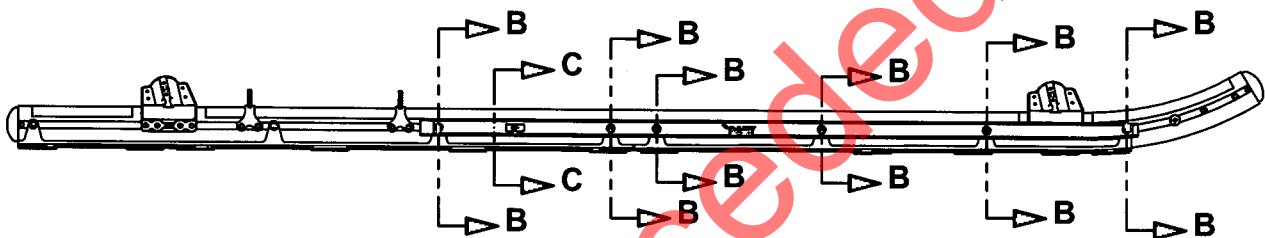


FIGURE 2: D119-646-314 SKIDTUBE PROTECTOR KIT, RH (SHOWN)
 (D119-646-313 SKIDTUBE PROTECTOR, LH (OPPOSITE))
 (SHOWN INSTALLED ON D119-646-211/-212 SKIDTUBES)


DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9734	SHEET 4 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

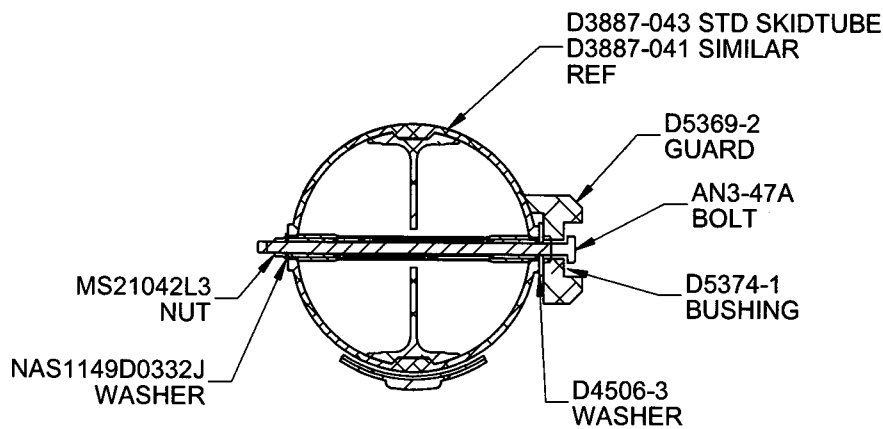

SECTION A-A

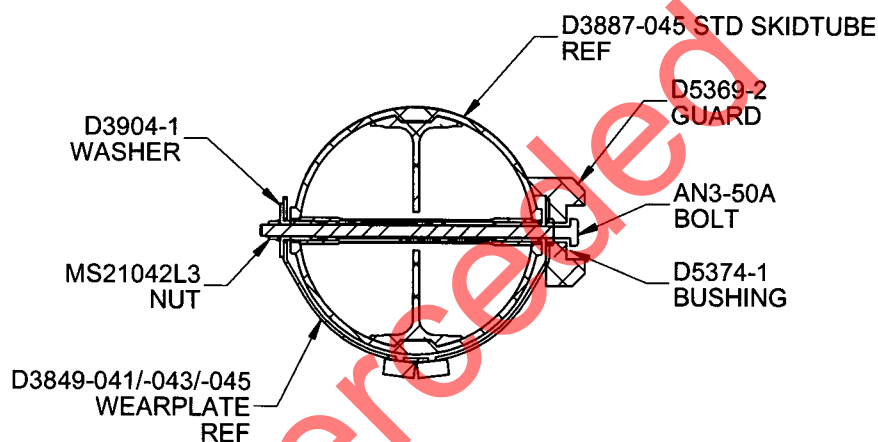

SECTION B-B

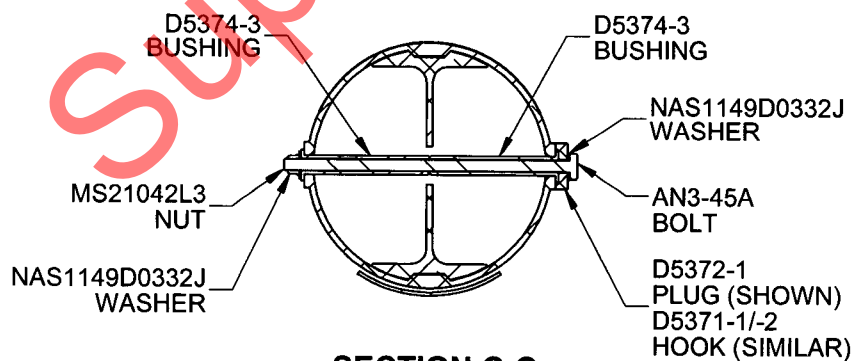

SECTION C-C

(D5369-2 NOT SHOWN FOR CLARITY)

DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO. DSI 9734	REV. A
MFG. APPR.	N/A		SHEET 5 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	



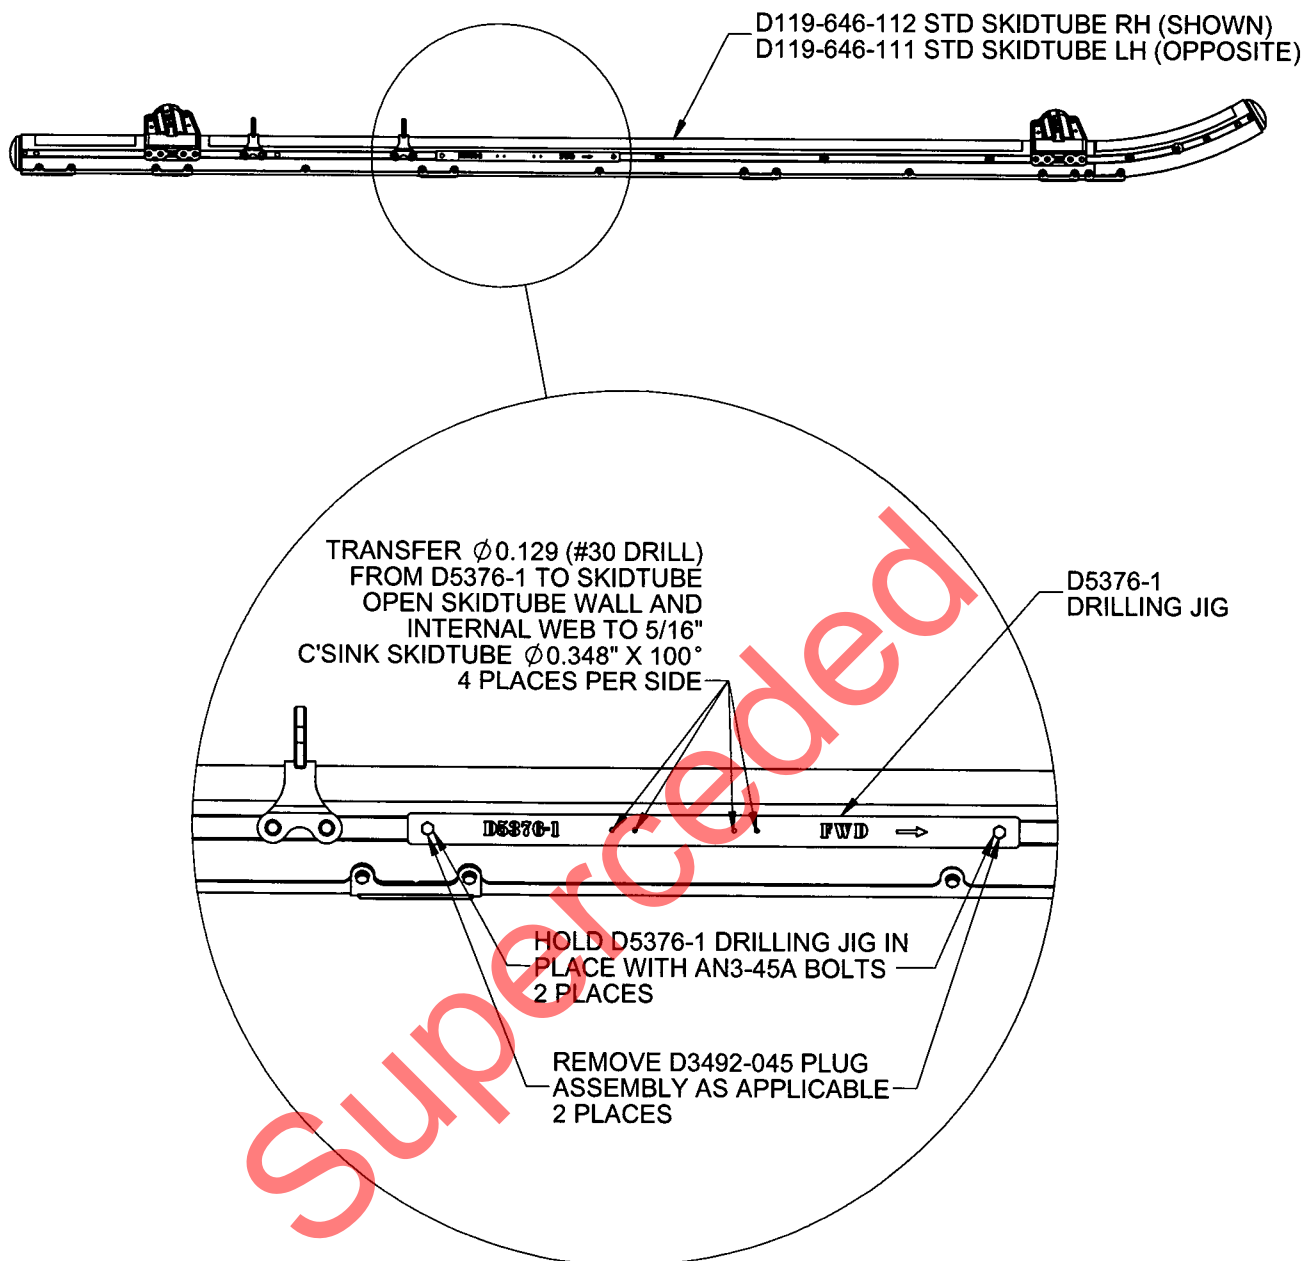


FIGURE 3: USING D5376-1 DRILLING JIG



DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9734	SHEET 6 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

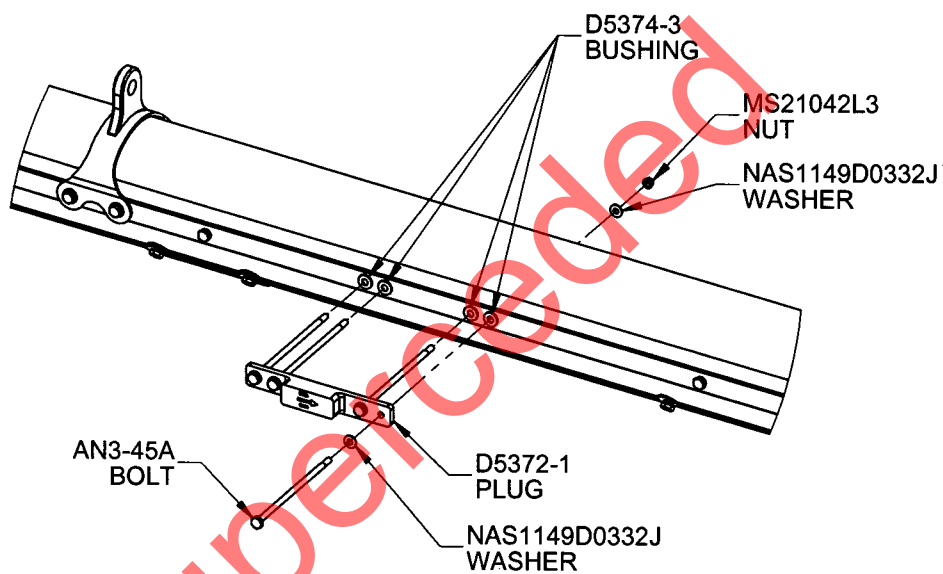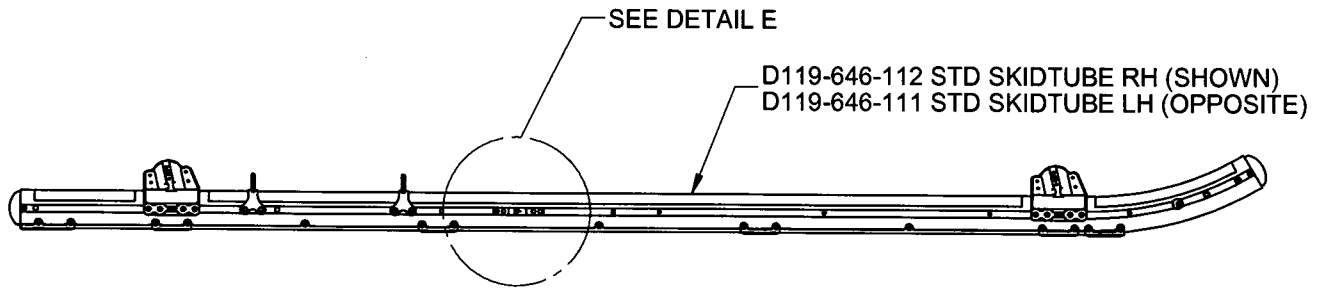

DETAIL E


FIGURE 4: D5372-1 PLUG INSTALLATION

DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO. DSI 9734	REV. A
MFG. APPR.	N/A		SHEET 7 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	<small>COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	

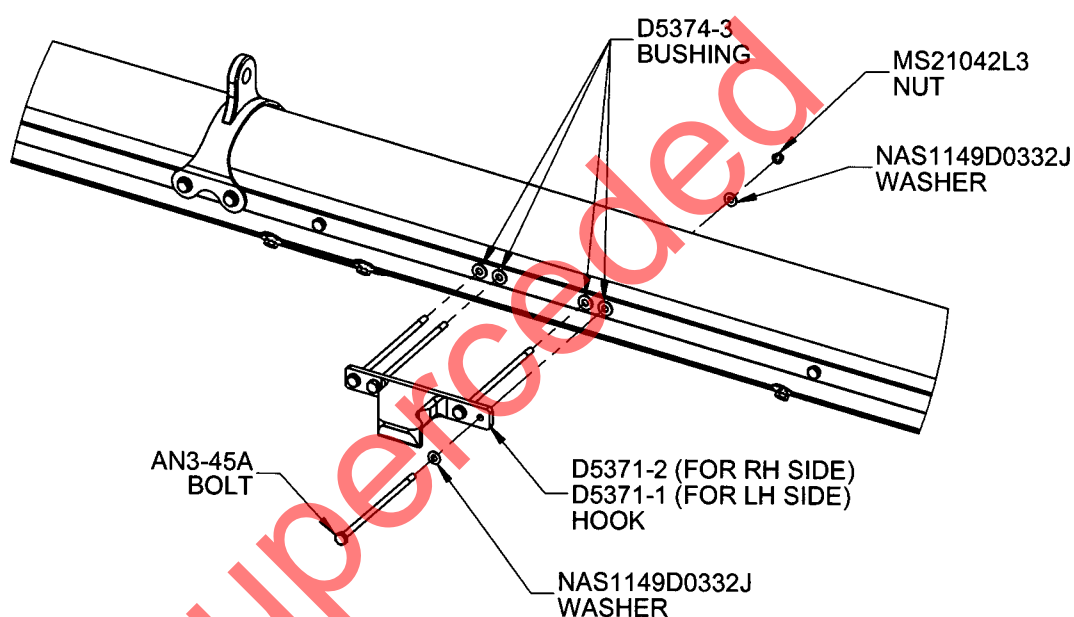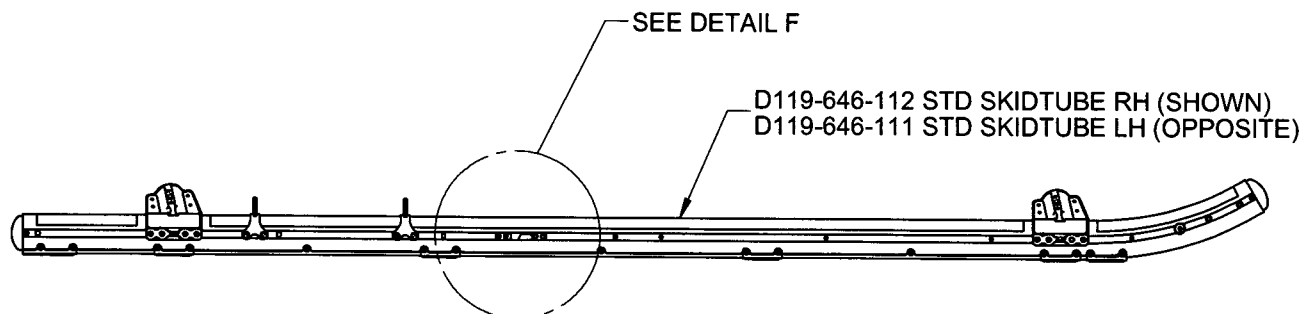

DETAIL F

FIGURE 5: D5371-1/-2 HOOK INSTALLATION

DESIGN	RF	DART AEROSPACE USA, INC. EUGENE, OR	
DRAWN	RF		
CHECKED	HS	DRAWING NO. DSI 9734	REV. A
MFG. APPR.	N/A		SHEET 8 OF 8
APPROVED	HS	TITLE	SCALE
DE APPR.		SKIDTUBE PROTECTOR KIT	NTS
DATE	15.12.10	COPYRIGHT © 2014 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.</small>	